

SPS SAFE

Active electrical protectors



SPS SAFE: Multi-outlet power strips for powering and protecting equipment in the office and the home

Salicru's **SPS SAFE** series is a complete range of multi-outlet power strip active electrical protectors, ideal for protecting office and home electronics. Featuring basic 3 and 6-outlet models, the **SPS SAFE 3** and **SPS SAFE 6**, respectively, the **SPS SAFE 7**, model with 7 sockets, EMI/RFI filter and built-in cable collector, and the **SPS SAFE 5++** and **SPS SAFE Master** with 5 sockets and 2 USB chargers for charging electronic devices.

The **SPS SAFE Master** model also features, in addition to the EMI/RFI filter, a master/slave function to achieve significant savings by preventing load 'vampire' consumption in standby.

Performances

- Next-generation active electrical protectors.
- Wide range of models (3, 5, 6 and 7 sockets).
- Models with built-in dual USB charger. ⁽¹⁾
- Schuko sockets, orientated for easy connection.
- Possibility of wall mounting. Surge control indicator.
- EMI/RFI filter for electrical noise reduction. ⁽²⁾
- On/off switch on all models.
- Financial warranty for protected devices. ⁽²⁾
- MOV technology: Absorb surges & high energy spikes. ⁽²⁾

(1) Safe 5+ and Safe Master


(2) Safe 7 and Safe Master



salicru

Applications: Superior electrical protection

Salicru's **SPS SAFE** series models are the best allies for office and home electronic protect: PC, printer, scanner, photocopier, router, hub/switch, external HDD, modem, phone, TV/LCD, home cinema, Hi-Fi, SAT, domotics, videoconsole, electric home appliances,...

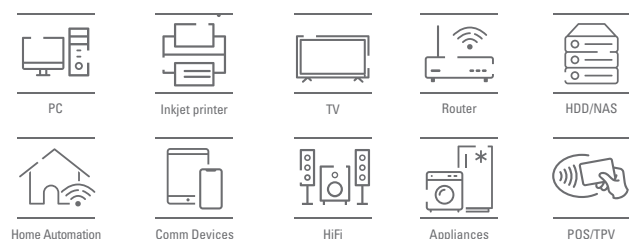

Technical specifications

MODEL		SPS SAFE 3	SPS SAFE 5+	SPS SAFE 6	SPS SAFE 7	SPS SAFE Master
Rated current (A)		10				
Rated voltage / frequency		250 V AC / 50 Hz				
Socket type and quantity		3 × schuko	5 × schuko	6 × schuko	7 × schuko	5 × schuko
USB charger		No	2 ports / 2.4 A / 5 VDC	No		2 ports / 2.4 A / 5 VDC
Maximum power dissipation (F-N, N-T and F-T)		380	306	380	918	
Maximum peak current		8 kA	12 kA	8 kA	36 kA	
Maximum peak voltage		6000 V				
Response time		< 1 ns				
On/off switch		Yes				
Possibility of wall mounting		Yes				
Length of power cable		1.5			1.8	
Child protection in the sockets		Yes				
Sockets orientated for easy connection		Yes				
Surge control indicator		Yes				
Active electrical protection		Yes				
Electrical protection		Fuse			MOV technology	
Smart Master/Slave electrical protection		No				Yes
Includes cable-marking plus cable-tie		No	Yes	No	Yes	
Cable wrap-organizer device		No			Yes	No
Extra space for great dimension mains		No			Yes	No
One AC outlet is always on		No				Yes
Financial warranty € (EU)		-			40000	60000
STANDARDS	Safety	IEC-60884-1; EN-61643-11; EN-61643-21				
	Corporate cerification	ISO 9001, ISO 14001, ISO 45001				
CODE		680BA000001	680BA000002	680BA000003	680BA000006	680BA000005

Information subject to change without notice.

